

T&S BRASS AND BRONZE WORKS, INC.
 2 SADDLEBACK COVE / P.O. BOX 1088 / TRAVELERS REST, SC 29690
 PHONE 800-476-4103 - FAX 864- 834-3518



Model No.

EV-2100-SM-LF05

**RELIABILITY
BUILT IN**

Job Name:

Architect/Engineer Approval:


Notes:

NOTE:

TO ENSURE PROPER OPERATION OF SENSOR FAUCET, SIDE MOUNT MIXER SHOULD REMAIN IN THE OPEN POSITION AT ALL TIMES

GOOSENECK BASE & SIDE MOUNT MIXER BOTH MOUNT ON 8" FORGED BRASS DECK PLATE.

SIDE MOUNT MIXER CONTROLS TEMPERATURE OF WATER THROUGH SENSOR MODULE & TO GOOSENECK

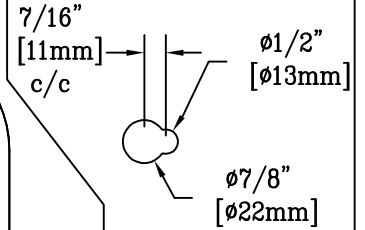

Detail 1:
HOLE PATTERN ON COVERPLATE FOR SHANK & WIRE

RIGID GOOSENECK w/ 0.5 GPM LAMINAR FLOW OUTLET.

DRILL 1-1/2" HOLE IN C'TOP FOR SIDE MOUNT
CONNECT CONTROL MODULE OUTLET TO FCT. SHANK

SEE DETAIL 1

CONNECT SIDE MOUNT OUTLET HOSE TO INLET OF CONTROL MODULE USING 016061-25 ADAPTER

3/8" COMPRESSION STOPS BY OTHERS

USE (2) FLEX SUPPLIES FROM STOPS TO SIDE MOUNT MIXER.

CHECK VALVE ASM. FOR CROSSFLOW PREVENTION. PLACE BETWEEN SUPPLY STOP & SUPPLY HOSE. TYP. BOTH SIDES

Product Description:

DECK MOUNT ELECTRONIC SENSOR FAUCET WITH SIDE MOUNT MIXER, 8" FORGED BRASS DECKPLATE, 0.5 GPM FLOW CONTROL, LAMINAR FLOW OUTLET, & CHECK VALVES FOR CROSSFLOW PREVENTION

Drawn:

WJS

Checked:

GEF

Scale:

1 : 4

Approved:

JHB

Date:

12/22/06